



MEDIA RELEASE
27th October 2008

East Energy moves step closer to delineation of JORC compliant resource at Blackall Project, QLD

Key points

- **Final core drilling and sampling is now underway during the last stage of exploration ,**
- **Coal quality results have started flowing through from laboratory analysis,**
- **Maiden JORC resource statement (inferred, indicated and measured) to be produced Q1 2009,**
- **Detailed analysis of drilling data will enable further upgrades of the mineralisation target.**

Perth-based coal exploration company East Energy Resources (“East Energy” or “the Company”) (**ASX: EER**) has moved a step closer to the delineation of a maiden JORC resource at its 100% owned Blackall Coal Project (EPC 1149) in the Adavale Basin in Queensland, with the Company in the final stage of a resource definition drilling program at the project.

The Blackall Coal Project is made up of 300 sub blocks and has a historical coal mineralisation target of 79-90 million tonnes of thermal coal¹. As a result of a Reverse Air Blast (RAB) drilling program that was completed earlier in the year the target mineralisation was upgraded to 200 to 220 million tonnes of thermal coal.

In accordance with section 18 of the JORC Code, the company wishes to state that the potential quantity and quality of this mineralisation target is conceptual in nature, with insufficient verification of exploration to define a mineral resource. It is uncertain if further exploration will result in the determination of a mineral resource.

The area explored to date is in excess of 200,000,000m² (refer attached Drill Hole location plan). The attached assay table indicates an average cumulative coal seam thickness in excess of 3m. The nominal density of coal is 1.346 tonnes per m³.

Results from the geological and geophysical logging are currently being correlated in the Company’s Logcheck software in order to create a three dimensional model of the coal deposit and to allow calculation of the coal resource volume.

Exploration and modeling conducted by the Company gives confidence that blending of the thermal coal on site will produce an average air dried CV of approximately 5000 k/cal. As a benchmark, several power stations in the Eastern States are using coal with a CV less than 4000 k/cal.

The assay tables indicate that the coal in EPC 1149 has a very low sulfur content meaning Blackall coal will have greatly reduced emissions of sulfur dioxide, which is an important environmental consideration.

Another important feature of the Blackall deposit is the very low strength of the over burden which will be amenable to excavation without the need for blasting.

¹ Mineralisation target is not JORC Compliant (Refer ASX announcement 22 January 2008)



ENDS

For further information please contact:

Mark Basso
Managing Director
Tel: 0412 844 422

David Tasker
Professional Public Relations
Tel: 08 9388 0944/ 0433 112 936

Website: www.eastenergy.com.au

Competent person statement


*The information in this report relating to resources is based on information compiled by Peter Tighe who is a member of the **Australasian Institute of Mining and Metallurgy** and who is employed by **East Energy Resources Ltd**. Mr Tighe has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2004 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves." Mr Tighe consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.*

Company Background


East Energy Resources has acquired the rights to two coal tenements in the Bowen Basin and Adavale Basin in Queensland.

The Norwich Park tenement is an exploration phase project with identified coal material in the western portion of the block. Coal measures are being mined adjacent to the tenement area and further data review, exploration and drilling is required to assess the area.

The Blackall tenement includes a potential quantity of coal measures of thermal coal, which has been defined by a limited number of drill holes. Large adjacent areas remain to be evaluated.

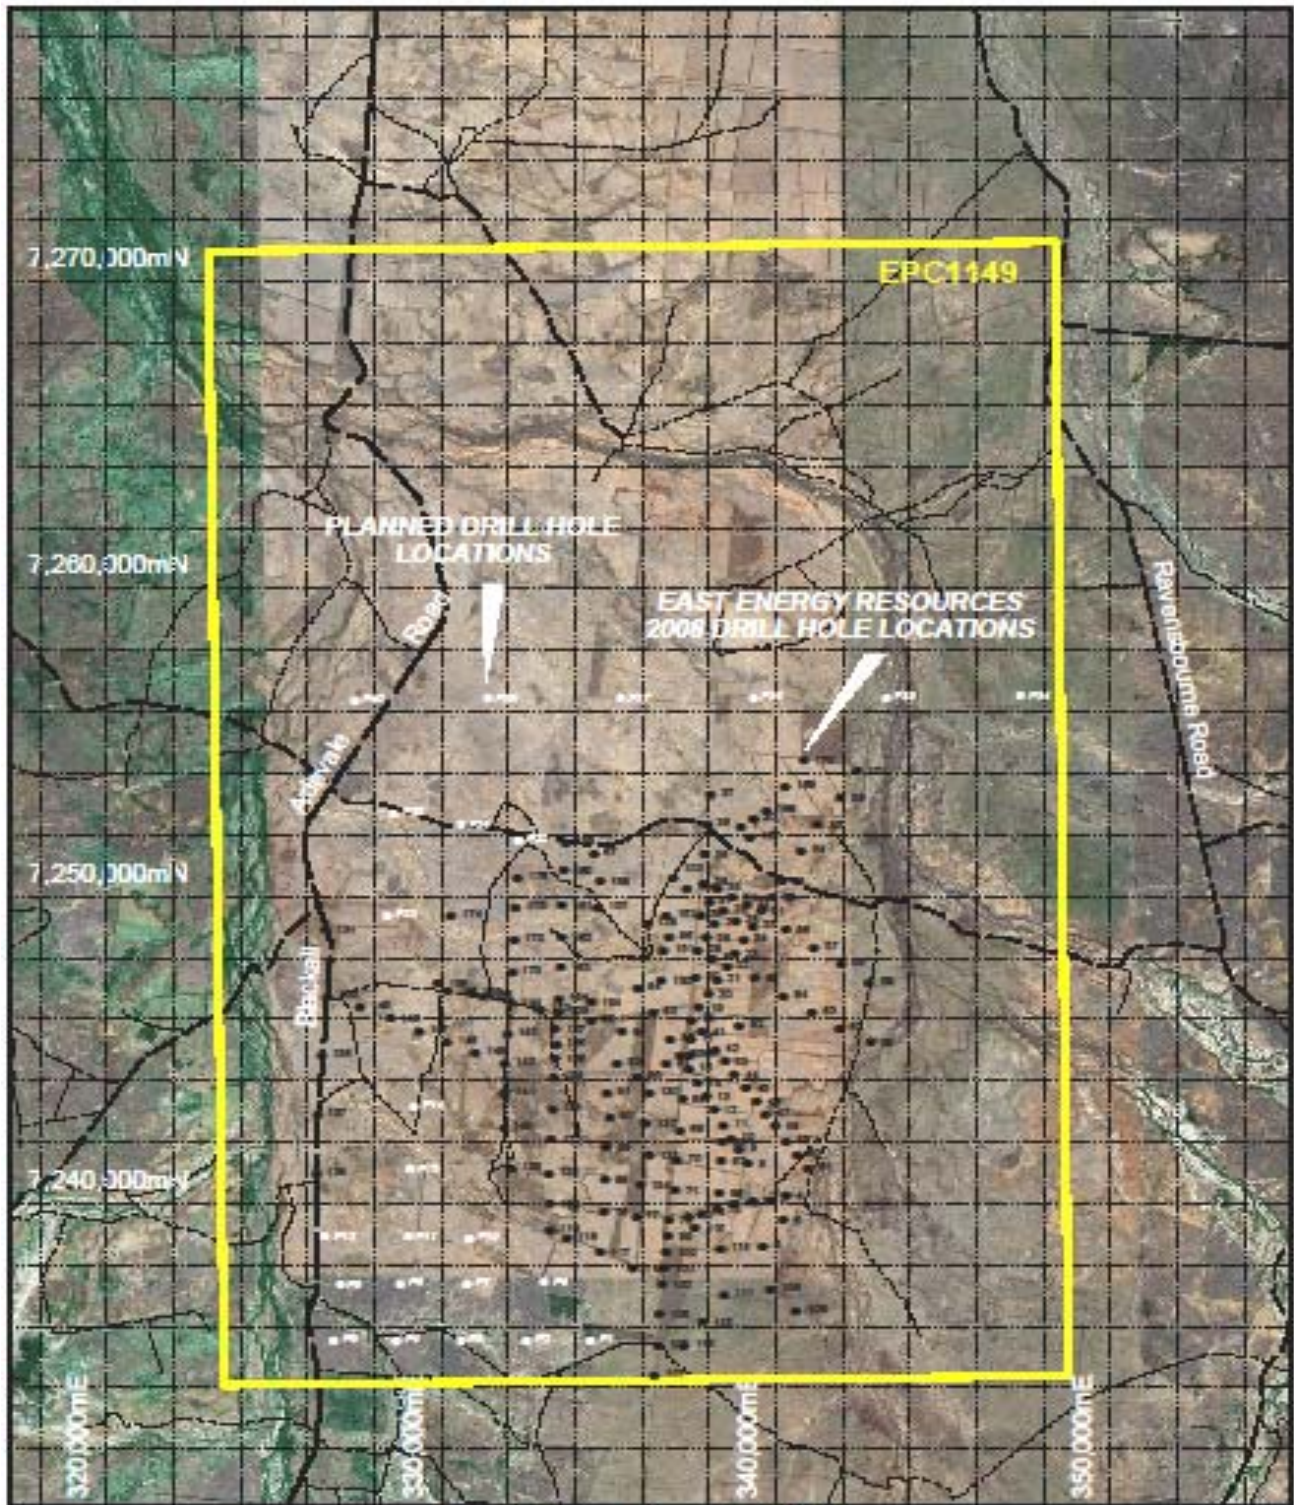

1:250,000
EPC1149 - BLACKALL
2008 DRILL HOLE LOCATIONS

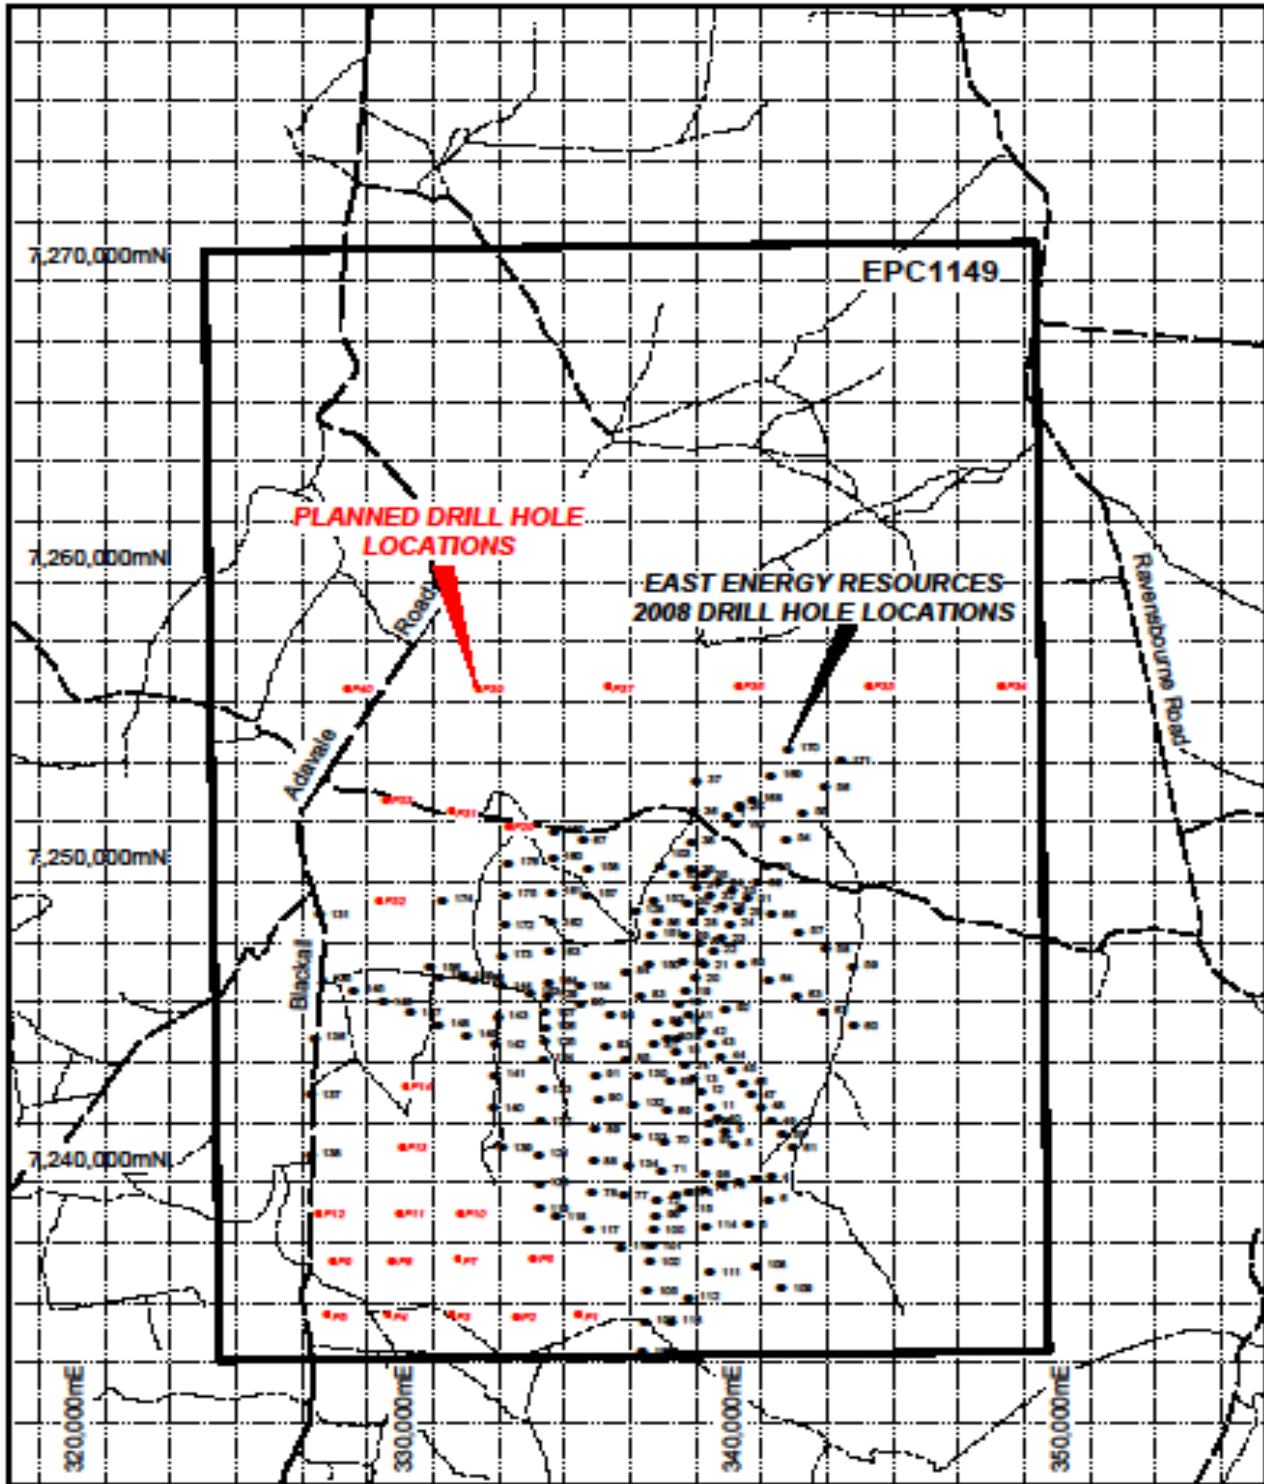

0 2 4 6 8 10 Km
1:250,000
**EPC1149 - BLACKALL
2008 DRILL HOLE LOCATIONS**



EPC 1149 Coring Program East Energy Resources Ltd Rev A - 06/10/08

| Hole No - Sample No | Sample Depth | | | F/Sink Fraction | %Mass | Proximate Analysis | | | | TS % (ad) | CV M/j (ad) | CV k/cal (ad) | CV M/j (daf) | CV k/cal (daf) |
|--|--------------|--------|-------------|-----------------|-------|--------------------|------------|-----------------|---------------|-----------|-------------|---------------|--------------|----------------|
| | From (m) | To (m) | Thick (m) | | | Moisture % (ad) | Ash % (ad) | Volatile % (ad) | Carbon % (ad) | | | | | |
| 2C - 1 | 55.83 | 56.55 | 0.72 | F1.60 | 83.3 | 14 | 11.6 | 31.8 | 42.6 | 0.11 | 21.5 | 5123 | 28.8 | 6886 |
| | | | | S1.60 | 16.7 | | | | | | | | | |
| 2C - 2 | 56.83 | 56.99 | 0.16 | F1.60 | 33.2 | 9 | 24.3 | 28.9 | 37.8 | | | | | |
| | | | | S1.60 | 66.8 | | | | | | | | | |
| 2C - 3 | 69.15 | 69.86 | 0.71 | F1.60 | 72.7 | 14.8 | 4.2 | 32.6 | 48.4 | 0.04 | 23.1 | 5505 | 28.5 | 6797 |
| | | | | S1.60 | 27.3 | | | | | | | | | |
| 2C - 4 | 72.5 | 72.88 | 0.38 | F1.60 | 95.9 | 12.3 | 8.7 | 33.6 | 45.4 | | | | | |
| | | | | S1.60 | 4.1 | | | | | | | | | |
| 2C - 5 | 77.1 | 79.39 | 2.29 | F1.60 | 47.8 | 15.6 | 11.6 | 30.5 | 42.3 | 0.07 | 20.9 | 4994 | 28.7 | 6860 |
| | | | | S1.60 | 52.2 | | | | | | | | | |
| 2C - 6 | 81.96 | 82.65 | 0.69 | F1.60 | 97.7 | 16.6 | 9.1 | 30.3 | 44 | 0.02 | 21.4 | 5102 | 28.7 | 6866 |
| | | | | S1.60 | 2.3 | | | | | | | | | |
| 2C - 7 | 86.3 | 87.2 | 0.9 | F1.60 | 81.5 | 12.9 | 16.4 | 30.5 | 40.2 | 0.08 | 20.2 | 4827 | 28.6 | 6828 |
| | | | | S1.60 | 18.5 | | | | | | | | | |
| 2C - 8 | 87.64 | 88.04 | 0.4 | F1.60 | 97.4 | 12.1 | 9.3 | 31.8 | 46.8 | | | | | |
| | | | | S1.60 | 2.6 | | | | | | | | | |
| Total coal thickness sampled in Hole 2C | | | 6.25 | | | | | | | | | | | |

| Hole No - Sample No | Sample Depth | | | F/Sink Fraction | %Mass | Proximate Analysis | | | | TS % (ad) | CV M/j (ad) | CV k/cal (ad) | CV M/j (daf) | CV k/cal (daf) |
|---|--------------|--------|-------------|-----------------|-------|--------------------|------------|-----------------|---------------|-----------|-------------|---------------|--------------|----------------|
| | From (m) | To (m) | Thick (m) | | | Moisture % (ad) | Ash % (ad) | Volatile % (ad) | Carbon % (ad) | | | | | |
| 17C - 1 | 12.77 | 15.23 | 2.46 | F1.60 | 92.4 | 20.9 | 7.8 | 29.6 | 41.7 | 0.24 | 20.5 | 4894 | 28.7 | 6864 |
| | | | | S1.60 | 7.6 | | | | | | | | | |
| Total coal thickness sampled in Hole 17C | | | 2.46 | | | | | | | | | | | |



| Hole No - Sample No | Sample Depth | | | F/Sink Fraction | %Mass | Proximate Analysis | | | | TS % (ad) | CV M/j (ad) | CV k/cal (ad) | CV M/j (daf) | CV k/cal (daf) |
|---|--------------|--------|-------------|-----------------|-------|--------------------|------------|-----------------|---------------|-----------|-------------|---------------|--------------|----------------|
| | From (m) | To (m) | Thick (m) | | | Moisture % (ad) | Ash % (ad) | Volatile % (ad) | Carbon % (ad) | | | | | |
| 19C - 1 | 22.6 | 23.18 | 0.58 | F1.60 | 93.9 | 20.6 | 12.9 | 28.6 | 37.9 | 0.33 | 19.1 | 4552 | 28.7 | 6846 |
| | | | | S1.60 | 6.1 | | | | | | | | | |
| 19C - 2 | 23.6 | 23.79 | 0.19 | F1.60 | 85.6 | 14.8 | 9.7 | 29.8 | 45.7 | 0.29 | 21.1 | 5049 | 28 | 6688 |
| | | | | S1.60 | 14.4 | | | | | | | | | |
| 19C - 3 | 24.48 | 26.23 | 1.75 | F1.60 | 83.2 | 12.4 | 15.8 | 31.1 | 40.7 | 0.32 | 20.1 | 4789 | 27.9 | 6670 |
| | | | | S1.60 | 16.8 | | | | | | | | | |
| Total coal thickness sampled in Hole 19C | | | 2.52 | | | | | | | | | | | |
| Hole No - Sample No | Sample Depth | | | F/Sink Fraction | %Mass | Proximate Analysis | | | | TS % (ad) | CV M/j (ad) | CV k/cal (ad) | CV M/j (daf) | CV k/cal (daf) |
| | From (m) | To (m) | Thick (m) | | | Moisture % (ad) | Ash % (ad) | Volatile % (ad) | Carbon % (ad) | | | | | |
| 23C - 1 | 16.36 | 17.67 | 1.31 | F1.60 | 77.5 | 12.1 | 10.1 | 31.4 | 46.4 | 0.3 | 21.7 | 5183 | 27.9 | 6662 |
| | | | | S1.60 | 22.5 | | | | | | | | | |
| 23C - 2 | 17.92 | 19.42 | 1.5 | F1.60 | 87.4 | 15.8 | 6.8 | 32.8 | 44.6 | 0.48 | 22.2 | 5310 | 28.7 | 6860 |
| | | | | S1.60 | 12.6 | | | | | | | | | |
| 23C - 3 | 21.62 | 23.34 | 1.72 | F1.60 | 87.6 | 12.5 | 5.6 | 34.5 | 47.4 | 0.33 | 23.2 | 5546 | 28.4 | 6772 |
| | | | | S1.60 | 12.4 | | | | | | | | | |
| 23C - 4 | 24.14 | 24.73 | 0.59 | F1.60 | 75 | 15.7 | 16.4 | 27.8 | 40.1 | 0.24 | 18.9 | 4509 | 27.8 | 6640 |
| | | | | S1.60 | 25 | | | | | | | | | |
| Total coal thickness sampled in Hole 23C | | | 5.12 | | | | | | | | | | | |
| Hole No - Sample No | Sample Depth | | | F/Sink Fraction | %Mass | Proximate Analysis | | | | TS % (ad) | CV M/j (ad) | CV k/cal (ad) | CV M/j (daf) | CV k/cal (daf) |
| | From (m) | To (m) | Thick (m) | | | Moisture % (ad) | Ash % (ad) | Volatile % (ad) | Carbon % (ad) | | | | | |
| 26C - 1 | 16.64 | 18.78 | 2.14 | F1.60 | 97.9 | 14.2 | 4.7 | 33.7 | 47.4 | 0.27 | 22.6 | 5386 | 27.8 | 6641 |
| | | | | S1.60 | 2.1 | | | | | | | | | |
| 26C - 2 | 18.91 | 19.5 | 0.59 | F1.60 | 87.6 | 21.4 | 10 | 27.5 | 41.1 | 0.23 | 20.4 | 4863 | 29.7 | 7089 |
| | | | | S1.60 | 12.4 | | | | | | | | | |
| 26C - 3 | 22.16 | 23.73 | 1.57 | F1.60 | 89.6 | 12 | 15.7 | 30.6 | 41.7 | 0.24 | 20.3 | 4853 | 28.1 | 6713 |

| | | | | S1.60 | 10.4 | | | | | | | | | | |
|---|--------------|--------|-------------|-----------------|-------|--------------------|------------|-----------------|---------------|-----------|-------------|---------------|--------------|----------------|--|
| 26C - 4 | 24.04 | 24.35 | 0.31 | F1.60 | 82 | 13.5 | 27.8 | 26.7 | 32 | 0.25 | 17.3 | 4134 | 29.5 | 7043 | |
| | | | | S1.60 | 18 | | | | | | | | | | |
| Total coal thickness sampled in Hole 26C | | | 4.61 | | | | | | | | | | | | |
| Hole No - Sample No | Sample Depth | | | F/Sink Fraction | %Mass | Proximate Analysis | | | | TS % (ad) | CV M/j (ad) | CV k/cal (ad) | CV M/j (daf) | CV k/cal (daf) | |
| | From (m) | To (m) | Thick (m) | | | Moisture % (ad) | Ash % (ad) | Volatile % (ad) | Carbon % (ad) | | | | | | |
| 29C - 1 | 29.61 | 30.74 | 1.13 | F1.60 | 91 | 13.9 | 8.9 | 31.5 | 45.7 | 0.22 | 22.1 | 5269 | 28.6 | 6825 | |
| | | | | S1.60 | 9 | | | | | | | | | | |
| 29C - 2 | 30.74 | 31.67 | 0.93 | F1.60 | 73.3 | 12.7 | 23.2 | 28.6 | 35.5 | 0.27 | 18 | 4306 | 28.1 | 6718 | |
| | | | | S1.60 | 26.7 | | | | | | | | | | |
| Total coal thickness sampled in Hole 29C | | | 2.06 | | | | | | | | | | | | |
| Hole No - Sample No | Sample Depth | | | F/Sink Fraction | %Mass | Proximate Analysis | | | | TS % (ad) | CV M/j (ad) | CV k/cal (ad) | CV M/j (daf) | CV k/cal (daf) | |
| | From (m) | To (m) | Thick (m) | | | Moisture % (ad) | Ash % (ad) | Volatile % (ad) | Carbon % (ad) | | | | | | |
| 31C - 1 | 44.03 | 45 | 0.97 | F1.60 | 98.8 | 13 | 9.1 | 31.6 | 46.3 | 0.22 | 22.7 | 5412 | 29.1 | 6948 | |
| | | | | S1.60 | 1.2 | | | | | | | | | | |
| 31C - 2 | 59.41 | 60.03 | 0.62 | F1.60 | 96.2 | 18.1 | 5.4 | 29.9 | 46.6 | 0.27 | 21.9 | 5224 | 28.6 | 6828 | |
| | | | | S1.60 | 3.8 | | | | | | | | | | |
| 31C - 3 | 62.62 | 64.1 | 1.48 | F1.60 | 93.3 | 13.8 | 12 | 30.7 | 43.5 | 0.52 | 21.6 | 5157 | 29.1 | 6950 | |
| | | | | S1.60 | 6.7 | | | | | | | | | | |
| 31C - 4 | 66.28 | 67.04 | 0.76 | F1.60 | 99.4 | 21.9 | 6.4 | 29.5 | 42.2 | 0.51 | 21.3 | 5087 | 29.7 | 7095 | |
| | | | | S1.60 | 0.6 | | | | | | | | | | |
| 31C - 5 | 67.38 | 68.16 | 0.78 | F1.60 | 65 | 18.4 | 17.5 | 26.6 | 37.5 | 0.33 | 18.1 | 4321 | 28.2 | 6741 | |
| | | | | S1.60 | 35 | | | | | | | | | | |
| Total coal thickness sampled in Hole 31C | | | 4.61 | | | | | | | | | | | | |

| Hole No - Sample No | Sample Depth | | | F/Sink Fraction | %Mass | Proximate Analysis | | | | TS % (ad) | CV M/j (ad) | CV k/cal (ad) | CV M/j (daf) | CV k/cal (daf) |
|---|--------------|--------|-------------|-----------------|-------|--------------------|------------|-----------------|---------------|-----------|-------------|---------------|--------------|----------------|
| | From (m) | To (m) | Thick (m) | | | Moisture % (ad) | Ash % (ad) | Volatile % (ad) | Carbon % (ad) | | | | | |
| 69C - 1 | 55.61 | 56 | 0.39 | F1.60 | 81.7 | 18.7 | 15.2 | 28 | 38.1 | 0.36 | 18.9 | 4524 | 28.7 | 6844 |
| | | | | S1.60 | 18.3 | | | | | | | | | |
| 69C - 2 | 57.5 | 58.99 | 1.49 | F1.60 | 70.7 | 11.4 | 20.6 | 29.3 | 38.7 | 0.39 | 19.3 | 4610 | 28.4 | 6779 |
| | | | | S1.60 | 29.3 | | | | | | | | | |
| 69C - 3 | 59.31 | 60.23 | 0.92 | F1.60 | 90.6 | 19 | 4.7 | 30.2 | 46.1 | 0.16 | 21.9 | 5238 | 28.7 | 6865 |
| | | | | S1.60 | 9.4 | | | | | | | | | |
| 69C - 4 | 63.37 | 65.18 | 1.81 | F1.60 | 95.6 | 21 | 7.9 | 29.6 | 41.5 | 0.38 | 20.5 | 4894 | 28.8 | 6883 |
| | | | | S1.60 | 4.4 | | | | | | | | | |
| 69C - 5 | 65.93 | 66.54 | 0.61 | F1.60 | 99.3 | 18.2 | 5.5 | 30.5 | 45.8 | 0.35 | 22.1 | 5288 | 29 | 6931 |
| | | | | S1.60 | 0.7 | | | | | | | | | |
| 69C - 6 | 67.12 | 67.65 | 0.53 | F1.60 | 98.8 | 20 | 7.8 | 30 | 42.3 | 0.51 | 20.9 | 4985 | 28.9 | 6904 |
| | | | | S1.60 | 1.2 | | | | | | | | | |
| Total coal thickness sampled in Hole 69C | | | 5.75 | | | | | | | | | | | |

| Hole No - Sample No | Sample Depth | | | F/Sink Fraction | %Mass | Proximate Analysis | | | | TS % (ad) | CV M/j (ad) | CV k/cal (ad) | CV M/j (daf) | CV k/cal (daf) |
|---------------------|--------------|--------|-----------|-----------------|-------|--------------------|------------|-----------------|---------------|-----------|-------------|---------------|--------------|----------------|
| | From (m) | To (m) | Thick (m) | | | Moisture % (ad) | Ash % (ad) | Volatile % (ad) | Carbon % (ad) | | | | | |
| 72C - 1 | 43.65 | 44 | 0.35 | F1.60 | 88.8 | 19.2 | 15.3 | 19.2 | 46.3 | 0.35 | 18.6 | 4440 | 28.4 | 6779 |
| | | | | S1.60 | 11.2 | | | | | | | | | |
| 72C - 2 | 44.5 | 46.5 | 2 | F1.60 | 77.6 | 22.8 | 13.8 | 28.5 | 34.9 | 0.23 | 18.2 | 4357 | 28.8 | 6872 |
| | | | | S1.60 | 22.4 | | | | | | | | | |
| 72C - 3 | 47.95 | 48.96 | 1.01 | F1.60 | 99.4 | 23.5 | 5.4 | 35.6 | 35.5 | 0.25 | 20.4 | 4872 | 28.7 | 6853 |
| | | | | S1.60 | 0.6 | | | | | | | | | |
| 72C - 4 | 52.86 | 53.53 | 0.67 | F1.60 | 77.2 | 22 | 20.3 | 28.5 | 29.2 | 0.94 | 19.5 | 4655 | 28.7 | 6866 |
| | | | | S1.60 | 22.8 | | | | | | | | | |
| 72C - 5 | 63.89 | 66.05 | 2.16 | F1.60 | 96.6 | 15 | 13 | 30.9 | 41.1 | 0.45 | 20.7 | 4944 | 28.8 | 6867 |



| | | | | S1.60 | 3.4 | | | | | | | | | | |
|---|--------------|--------|-------------|-----------------|-------|--------------------|------------|-----------------|---------------|-----------|-------------|---------------|--------------|----------------|--|
| 72C - 6 | 67.12 | 68.63 | 1.51 | F1.60 | 74.3 | 24.6 | 14.8 | 26.4 | 34.2 | 0.29 | 17.3 | 4134 | 28.6 | 6822 | |
| | | | | S1.60 | 25.7 | | | | | | | | | | |
| 72C - 7 | 69.31 | 69.69 | 0.38 | F1.60 | 93.3 | 12.5 | 12.1 | 31.8 | 43.6 | 0.74 | 21.9 | 5219 | 29 | 6921 | |
| | | | | S1.60 | 6.7 | | | | | | | | | | |
| Total coal thickness sampled in Hole 72C | | | 8.08 | | | | | | | | | | | | |
| Hole No - Sample No | Sample Depth | | | F/Sink Fraction | %Mass | Proximate Analysis | | | | TS % (ad) | CV M/j (ad) | CV k/cal (ad) | CV M/j (daf) | CV k/cal (daf) | |
| | From (m) | To (m) | Thick (m) | | | Moisture % (ad) | Ash % (ad) | Volatile % (ad) | Carbon % (ad) | | | | | | |
| EER47C - 1 | 12.82 | 13.9 | 1.08 | F1.60 | 99.2 | 25.4 | 6 | 31.4 | 37.2 | 0.24 | 20.5 | 4906 | 29.9 | 7151 | |
| | | | | S1.60 | 0.8 | | | | | | | | | | |
| EER47C - 2 | 14.5 | 15.05 | 0.55 | F1.60 | 98.9 | 19.3 | 5.5 | 30.4 | 44.8 | 0.33 | 21.6 | 5166 | 28.8 | 6870 | |
| | | | | S1.60 | 1.1 | | | | | | | | | | |
| EER47C - 3 | 15.95 | 16.82 | 0.87 | F1.60 | 98.9 | 25.2 | 6.3 | 33 | 35.5 | 0.41 | 20.1 | 4794 | 29.3 | 6998 | |
| | | | | S1.60 | 1.1 | | | | | | | | | | |
| EER47C - 4 | 18.19 | 19.55 | 1.36 | F1.60 | 92.9 | 18.8 | 10 | 29.1 | 42.1 | 0.49 | 19.9 | 4755 | 28 | 6688 | |
| | | | | S1.60 | 7.1 | | | | | | | | | | |
| Total coal thickness sampled in Hole 47C | | | 3.86 | | | | | | | | | | | | |
| Hole No - Sample No | Sample Depth | | | F/Sink Fraction | %Mass | Proximate Analysis | | | | TS % (ad) | CV M/j (ad) | CV k/cal (ad) | CV M/j (daf) | CV k/cal (daf) | |
| | From (m) | To (m) | Thick (m) | | | Moisture % (ad) | Ash % (ad) | Volatile % (ad) | Carbon % (ad) | | | | | | |
| EER16C - 1 | 27.22 | 28.51 | 1.29 | F1.60 | 94.7 | 14.5 | 8 | 31.99 | 45.51 | 0.23 | 21.8 | 5209 | 28.1 | 6722 | |
| | | | | S1.60 | 5.3 | | | | | | | | | | |
| EER16C - 2 | 28.51 | 28.66 | 0.15 | F1.60 | 11.5 | 12.7 | 19.74 | 29.12 | 38.44 | 0.29 | 18.8 | 4488 | 27.8 | 6643 | |
| | | | | S1.60 | 88.5 | | | | | | | | | | |
| EER16C - 3 | 28.66 | 29.81 | 1.15 | F1.60 | 91.3 | 13.38 | 14.43 | 31.77 | 40.42 | 0.29 | 20.1 | 4803 | 27.9 | 6654 | |
| | | | | S1.60 | 8.7 | | | | | | | | | | |
| EER16C - 4 | 30.55 | 30.89 | 0.34 | F1.60 | 87.4 | 11.32 | 20.22 | 31.53 | 36.93 | 0.37 | 19.8 | 4739 | 29 | 6922 | |
| | | | | S1.60 | 12.6 | | | | | | | | | | |



| EER16C - 5 | | 30.89 | 31.5 | 0.61 | F1.60 | 95.9 | 14.64 | 6.22 | 31.52 | 47.62 | 0.22 | 22.7 | 5419 | 28.7 | 6848 |
|---|--------------|--------|-----------|-----------------|-------|--------------------|------------|-----------------|---------------|-----------|-------------|---------------|--------------|----------------|------|
| | | | | | S1.60 | 4.1 | | | | | | | | | |
| EER16C - 6 | | 33.3 | 33.7 | 0.4 | F1.60 | 98.8 | 13.54 | 6.99 | 32.68 | 46.79 | 0.47 | 23 | 5486 | 28.9 | 6904 |
| | | | | | S1.60 | 1.2 | | | | | | | | | |
| Total coal thickness sampled in Hole 16C | | | | 3.94 | | | | | | | | | | | |
| Hole No - Sample No | Sample Depth | | | F/Sink Fraction | %Mass | Proximate Analysis | | | | TS % (ad) | CV M/j (ad) | CV k/cal (ad) | CV M/j (daf) | CV k/cal (daf) | |
| | From (m) | To (m) | Thick (m) | | | Moisture % (ad) | Ash % (ad) | Volatile % (ad) | Carbon % (ad) | | | | | | |
| EER44C - 1 | | 13.01 | 13.65 | 0.64 | F1.60 | 97.3 | 16.87 | 6.54 | 31.63 | 44.96 | 0.23 | 22.3 | 5319 | 29.1 | 6945 |
| | | | | | S1.60 | 2.7 | | | | | | | | | |
| EER44C - 2 | | 13.85 | 14.2 | 0.35 | F1.60 | 97.6 | 14.06 | 16.44 | 28.64 | 40.86 | 0.27 | 19.8 | 4720 | 28.4 | 6791 |
| | | | | | S1.60 | 2.4 | | | | | | | | | |
| EER44C - 3 | | 16.52 | 17.29 | 0.77 | F1.60 | 96.3 | 15.76 | 11.72 | 31.06 | 41.46 | 0.34 | 21.1 | 5040 | 29.1 | 6949 |
| | | | | | S1.60 | 3.7 | | | | | | | | | |
| EER44C - 4 | | 18.98 | 19.87 | 0.89 | F1.60 | 97.7 | 14.28 | 9.5 | 30.98 | 45.24 | 0.29 | 22 | 5259 | 28.9 | 6900 |
| | | | | | S1.60 | 2.3 | | | | | | | | | |
| EER44C - 5 | | 20.62 | 21.22 | 0.6 | F1.60 | 95.9 | 14.88 | 9.4 | 29.49 | 46.23 | 0.41 | 22 | 5262 | 29.1 | 6949 |
| | | | | | S1.60 | 4.1 | | | | | | | | | |
| Total coal thickness sampled in Hole 44C | | | | 3.25 | | | | | | | | | | | |
| Hole No - Sample No | Sample Depth | | | F/Sink Fraction | %Mass | Proximate Analysis | | | | TS % (ad) | CV M/j (ad) | CV k/cal (ad) | CV M/j (daf) | CV k/cal (daf) | |
| | From (m) | To (m) | Thick (m) | | | Moisture % (ad) | Ash % (ad) | Volatile % (ad) | Carbon % (ad) | | | | | | |
| EER9C - 1 | | 18.31 | 18.78 | 0.47 | F1.60 | 95.4 | 15.66 | 10.7 | 31.04 | 42.6 | 0.37 | 21.4 | 5102 | 29 | 6928 |
| | | | | | S1.60 | 4.6 | | | | | | | | | |
| EER9C - 2 | | 21.35 | 21.75 | 0.4 | F1.60 | 89.9 | 13.82 | 17.56 | 28.72 | 39.9 | 0.28 | 19.3 | 4615 | 28.2 | 6725 |
| | | | | | S1.60 | 10.1 | | | | | | | | | |
| EER9C - 3 | | 23.19 | 26.11 | 2.92 | F1.60 | 83.2 | 14.22 | 10.39 | 30.5 | 44.89 | 0.25 | 21.6 | 5150 | 28.6 | 6831 |
| | | | | | S1.60 | 16.8 | | | | | | | | | |
| EER9C - 4 | | 26.11 | 26.6 | 0.49 | F1.60 | 49.4 | 13.24 | 19.68 | 28.72 | 38.36 | 0.39 | 19 | 4538 | 28.3 | 6765 |
| | | | | | S1.60 | 50.6 | | | | | | | | | |



| | | | | | | | | | | | | | | | |
|--|--|-------|-------|-------------|-------|------|-------|-------|-------|-------|------|------|------|------|------|
| EER9C - 5 | | 26.6 | 27.17 | 0.57 | F1.60 | 90.6 | 15.21 | 7.65 | 30.67 | 46.47 | 0.33 | 22.6 | 5398 | 29.3 | 6998 |
| | | | | | S1.60 | 9.4 | | | | | | | | | |
| EER9C - 6 | | 27.24 | 28.1 | 0.86 | F1.60 | 96.1 | 13.73 | 5.18 | 30.31 | 50.78 | 0.23 | 22.9 | 5477 | 28.3 | 6754 |
| | | | | | S1.60 | 3.9 | | | | | | | | | |
| EER9C - 7 | | 28.81 | 29.43 | 0.62 | F1.60 | 93.4 | 13.56 | 15.73 | 29.9 | 40.81 | 0.25 | 19.7 | 4698 | 27.8 | 6644 |
| | | | | | S1.60 | 6.6 | | | | | | | | | |
| Total coal thickness sampled in Hole 9C | | | | 6.33 | | | | | | | | | | | |
| Average Coal Thickness(m) | | | | 4.53 | | | | | | | | | | | |